
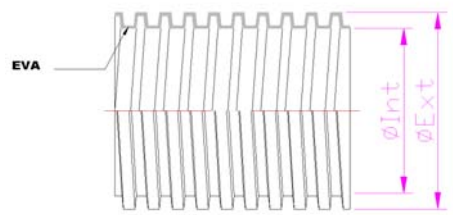


Ø interior Inside Ø	Ø exterior Outside Ø	Peso Weight	Presión Pressure	Vacío Vacuum	Long. Lenght	Presentación Presentation	Código Code
Tolerancia: ISO 1308		+/- 5%			Mín s/ISO 1307		
mm	mm	gr/m	bar	mH <sub>2</sub> O	m		
38	46	262	1	3	30	Rollo / Roll	437038
50	61	408	0,5	2,5	30	Rollo / Roll	437050
38	46	262	1	3	8	Caja / Box (*)	490008
38	46	262	1	3	10	Caja / Box (*)	490010
38	46	262	1	3	12	Caja / Box (*)	490012
38	46	262	1	3	15	Caja / Box (*)	490015






**Estructura / Structure:**  
Tubo flexible fabricado en EVA  
Tube manufactured with EVA

**Color / Colour:**  
Azul / Blue.

**Temperatura de uso / Temp. range:**  
-25 °C +60 °C

(\*) En las cajas, cada rollo lleva 2 manguitos (de rosca a izquierdas), incorporados a la manguera.  
In the boxes, each coil carries out 2 raccords (spiral left, incorporated to the hose).



**Aplicaciones / Applications:**

Limpeza autoflotante de piscinas (limpiafondos manual o automático)  
Swimming pool (floating) cleaning (manual or automatic way pool cleaning)

**Características / Features:**

Alta flexibilidad y resistencia a la fatiga mecánica. Elevadísima flotabilidad. Fabricada de una sola pieza (sin colas ni plastificantes)  
Radio de curvatura: 2xDi.  
High flexibility and resistance to mechanical fatigue. Very high floating. Manufactured in one piece (without glue. Not treated with plastic)  
Bending radius: 2xDi

Los valores de vacío y presión corresponden a temperaturas de trabajo de 20 °C. Flexiplas se reserva el derecho de modificar las especificaciones sin previo aviso.  
The detailed values of resistance to vacuum and pressure correspond to working temperatures between 20°C. Specifications are subject to change without notice.