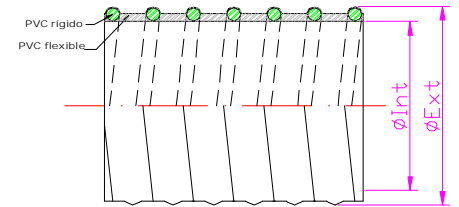



Ø interior Inside Ø Ø intérieur	Ø exterior Outside Ø Ø extérieur	Peso Weight Poids	Presión trabajo Work pressure Pression service	Vacío Vacuum Vide	Long. rollo Coil length Long. Cour	
Tolerancia: ISO 1307		+/- 5%			Mín s/ISO 1307	
"	mm	mm	bar	mH ₂ O	m	
	20	29	410	11	8	50
	25	35	500	10	8	50
	30	40	600	10	8	50
	35	45	705	10	8	50
	40	51	800	10	8	50
	45	56	920	8	8	50
	50	62	1.140	8	8	50
	60	73	1.400	7	8	50
	65	79	1.520	7	8	50
	70	84	1.700	7	8	50
	75	89	1.810	7	8	50
	80	94	1.950	6	8	50
	90	105	2.320	6	8	30
	100	117	3.000	5	8	30
	110	127	3.300	4,5	8	30


Estructura / Structure:

Tubería reforzada en PVC flexible con espiral de PVC rígido indeformable, con pared interior lisa.

Reinforced tube in flexible PVC with non-deformable rigid PVC spiral, with smooth inside wall.

Tuyau renforcé en PVC flexible à spirale en PVC indéformable, avec paroi intérieure lisse.

Color / Colou / Couleur:

Azul / Blue / Bleu

Temperatura de uso / Temp. range:

-10 °C +60 °C

*** Otros diámetros bajo petición - Further diameters upon request - Autres diâmetres sous demande

Aplicaciones / Applications / Applications:

Aspiración e impulsión de carburantes y aceites minerales por bombeo.

Suction and impulse pumping of fuels and minerals oils.

Pompage aspiration-refoulement de carburants et d'huiles minéraux.

Características / Features / Caractéristiques:

Atóxica. Resistente a diferentes productos químicos. Radio de curvatura: 3,5xDi. Fabricado según la norma UNE-EN-23994/93.

Non-toxic. Resistant to various chemical products. Bending radius: 3,5xID. [Manufactured in accordance to UNE-EN-23994/93.](#)

Atoxique. Tenue aux divers produits chimiques. Rayon de courbure: 3,5xDi. Fabriqué conforme la norme UNE-EN-23994/93

Los valores de vacío y presión corresponden a temperaturas de trabajo de 23 ± 2°C. Flexiplas se reserva el derecho de modificar las especificaciones sin previo aviso.
The detailed values of resistance to vacuum and pressure correspond to working temperatures between 23 ± 2°C. Specifications are subject to change without notice.
Le valeurs de résistance à la pression et vide correspondent aux températures de travail de 23 ± 2°C. Flexiplas se réserve le droit de modifier les spécifications sans avis préalable.