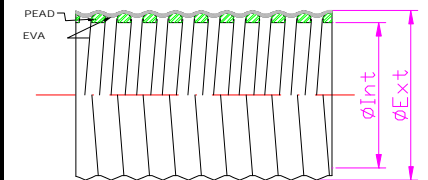


Ø interior Inside Ø		Ø exterior Outside Ø	Peso Weight +/- 5%	Presión trabajo Work pressure	Vacío Vacuum	Long. rollo Coil lenght Min s/ISO 1307
Tolerancia: ISO 1307						
"	mm	mm	gr/m	bar	mH <sub>2</sub> O	m
	32	39	224	2,5	6	30 / 50
	38	47	280	2	6	30 / 50
	50	60	430	1,5	6	30 / 50


**Estructura / Structure:**

Manguera en EVA con espiral de refuerzo de PEAD.  
Hose in EVA reinforced with HDPE spiral.

**Color / Colour:**

Código / Code 218: Azul / Blue.  
Código / Code 007: Blanco / White

**Temperatura de uso / Temp. range:**

-20 °C +65 °C


**Aplicaciones / Applications:**

Limpeza de piscinas para usos profesionales (hoteles, campings, piscinas deportivas y públicas, ...)  
Professional swimming pool cleaning (hotels, campsites, sport and public swimming pools, ...)

**Características / Features:**

Alta flexibilidad y ligereza. Autoflotante. Resistente a la fatiga, abrasión, vacío y agentes atmosféricos. Radio de curvatura: 2xDi.  
High flexibility and lightness. Auto-floating. Resistant to the fatigue, the abrasion, vacuum and the atmospheric agents.  
Bending radius: 2xD.

Los valores de vacío y presión corresponden a temperaturas de trabajo de 23 ± 2°C. Flexiplas se reserva el derecho de modificar las especificaciones sin previo aviso.  
The detailed values of resistance to vacuum and pressure correspond to working temperatures between 23 ± 2°C. Specifications are subject to change without notice.