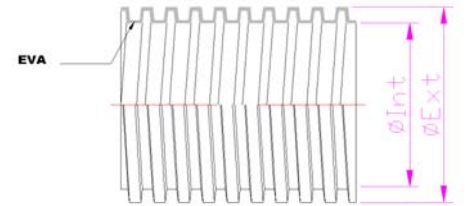


Ø interior Inside Ø	Ø exterior Outside Ø	Peso Weight	Presión Pressure	Vacío Vacuum	Long. Lenght	Presentación Presentation	Código Code
Tolerancia: ISO 1308		+/- 5%	bar	mH <sub>2</sub> O	Mín s/ISO 1307		
mm	mm						
38	46	262	1	3	30	Rollo / Roll	437038
50	61	408	0,5	2,5	30	Rollo / Roll	437050
38	46	262	1	3	8	Caja / Box (*)	490008
38	46	262	1	3	10	Caja / Box (*)	490010
38	46	262	1	3	12	Caja / Box (*)	490012
38	46	262	1	3	15	Caja / Box (*)	490015


**Estructura / Structure:**

Tubo flexible fabricado en EVA  
Tube manufactured with EVA

**Color / Colour:**

Azul / Blue.

**Temperatura de uso / Temp. range:**

-25 °C +60 °C

(\*) En las cajas, cada rollo lleva 2 manguitos (de rosca a izquierdas), incorporados a la manguera.

In the boxes, each coil carries out 2 raccords (spiral left, incorporated to the hose).


**Aplicaciones / Applications:**

Limpeza autoflotante de piscinas (limpiafondos manual o automático)

Swimming pool (floating) cleaning (manual or automatic way pool cleaning)

**Características / Features:**

Alta flexibilidad y resistencia a la fatiga mecánica. Elevadísima flotabilidad. Fabricada de una sola pieza (sin colas ni plastificantes)

Radio de curvatura: 2xDi.

High flexibility and resistance to mechanical fatigue. Very high floating. Manufactured in one piece (without glue. Not treated with plastic)

Bending radius: 2xDi

Los valores de vacío y presión corresponden a temperaturas de trabajo de 20 °C. Flexiplas se reserva el derecho de modificar las especificaciones sin previo aviso.

The detailed values of resistance to vacuum and pressure correspond to working temperatures between 20°C. Specifications are subject to change without notice.